

SPECIFICATIONS (LB-15)

1. 2" inlet and outlet connections, 2" vent connection.
2. Liquid holding capacity: 15 Gallons
3. Unit weight w/std. cover: 28 Pounds
4. Composite cover: 2,000 lb capacity (standard).
5. Maximum operating temperature 140°F continuous.

NOTES


1. For gravity drainage applications only. Do not use for pressure applications.
2. 3/8" thick seamless medium density polyethylene walls.
3. Cover placement allows full access to tank for proper maintenance.
4. Engineered inlet diffuser is removable to inspect/clean piping.
5. For on the-floor or buried applications.

ENGINEER SPECIFICATION GUIDE


Striem Lab Basin™ neutralization tank model LB-15 shall be lifetime guaranteed and Made in USA of seamless, rotationally-molded polyethylene with minimum 3/8" uniform wall thickness. Tank shall be furnished with inlets, outlets, vents, cover, riser system, monitoring equipment and other modifications per jobsite-specific conditions and per engineer's specification.

Directions: Complete steps 1-4 and submit signed with purchase order.

1. Choose Connection Locations.

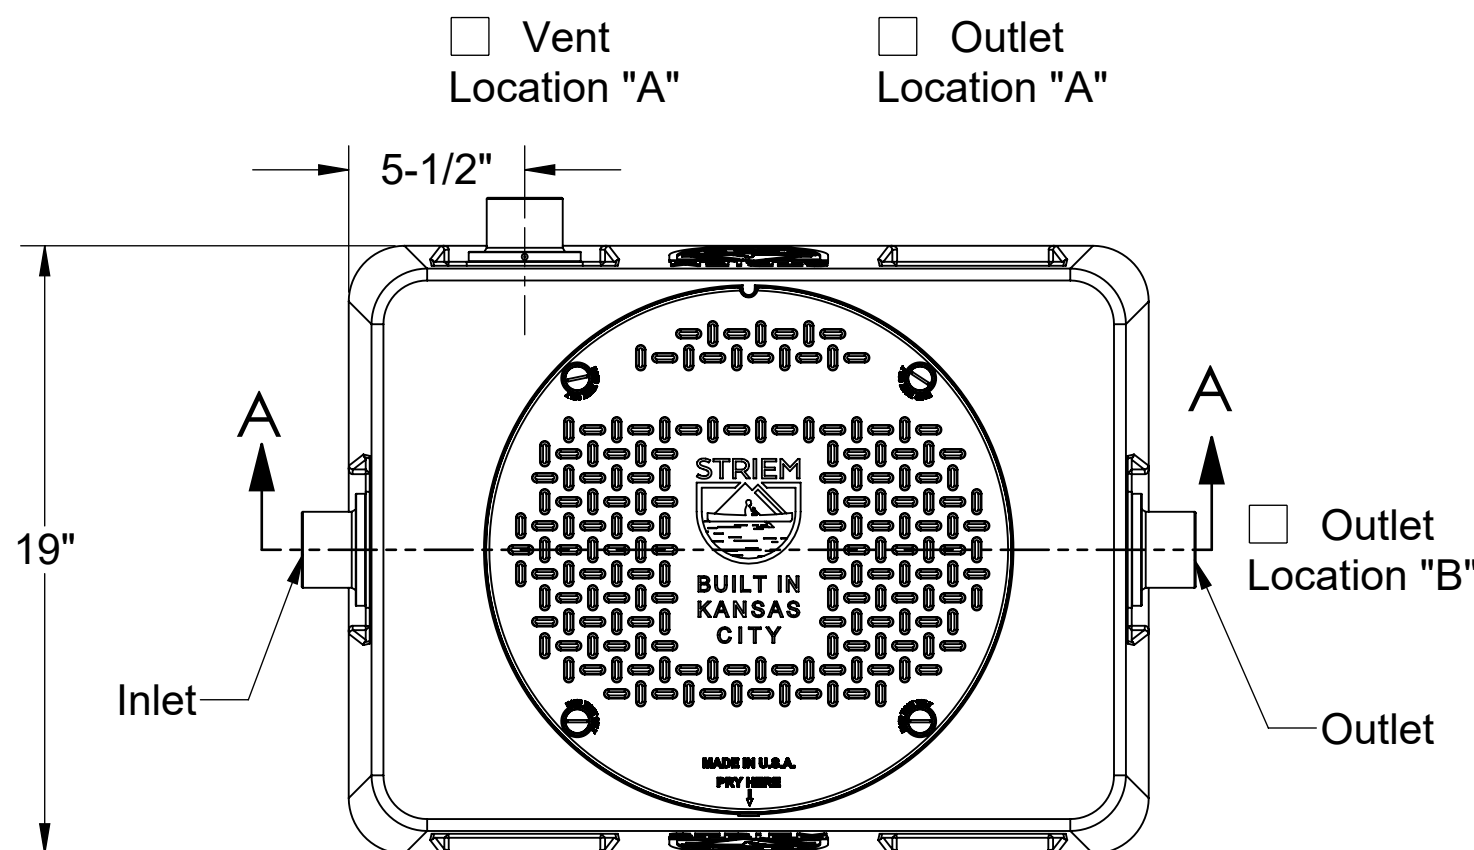

TOP VIEW



2. Choose Connection Types.


- | | |
|--|---------------------------------|
| Inlet | Size |
| <input type="checkbox"/> Plain End | <input type="checkbox"/> 1-1/2" |
| <input type="checkbox"/> Female Thread | <input type="checkbox"/> 2" |
| <input type="checkbox"/> Flanged | <input type="checkbox"/> 3" |
| Outlet | Size |
| <input type="checkbox"/> Plain End | <input type="checkbox"/> 1-1/2" |
| <input type="checkbox"/> Female Thread | <input type="checkbox"/> 2" |
| <input type="checkbox"/> Flanged | <input type="checkbox"/> 3" |
| Vent | Size |
| <input type="checkbox"/> Plain End | <input type="checkbox"/> 1-1/2" |
| <input type="checkbox"/> Female Thread | <input type="checkbox"/> 2" |
| <input type="checkbox"/> Flanged | <input type="checkbox"/> 3" |

3. Choose Diptube Locations.


Diptube at: Inlet Outlet Both (Ohio Code)
(Provided on inlet if not specified)

4. Choose Additional Options

- SR16** - 2-1/8"-16" 16 Series Riser
- CC-1** - Command Center pH Monitoring Package
- 90%+ Calcium Carbonate Limestone

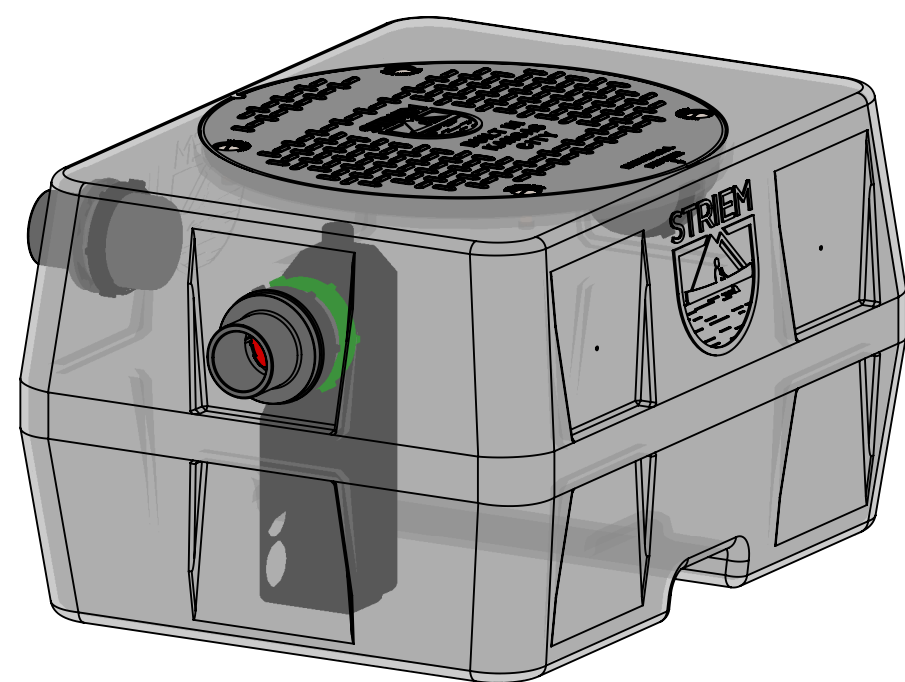

Closed top inlet diffuser to provide sewer gas trap

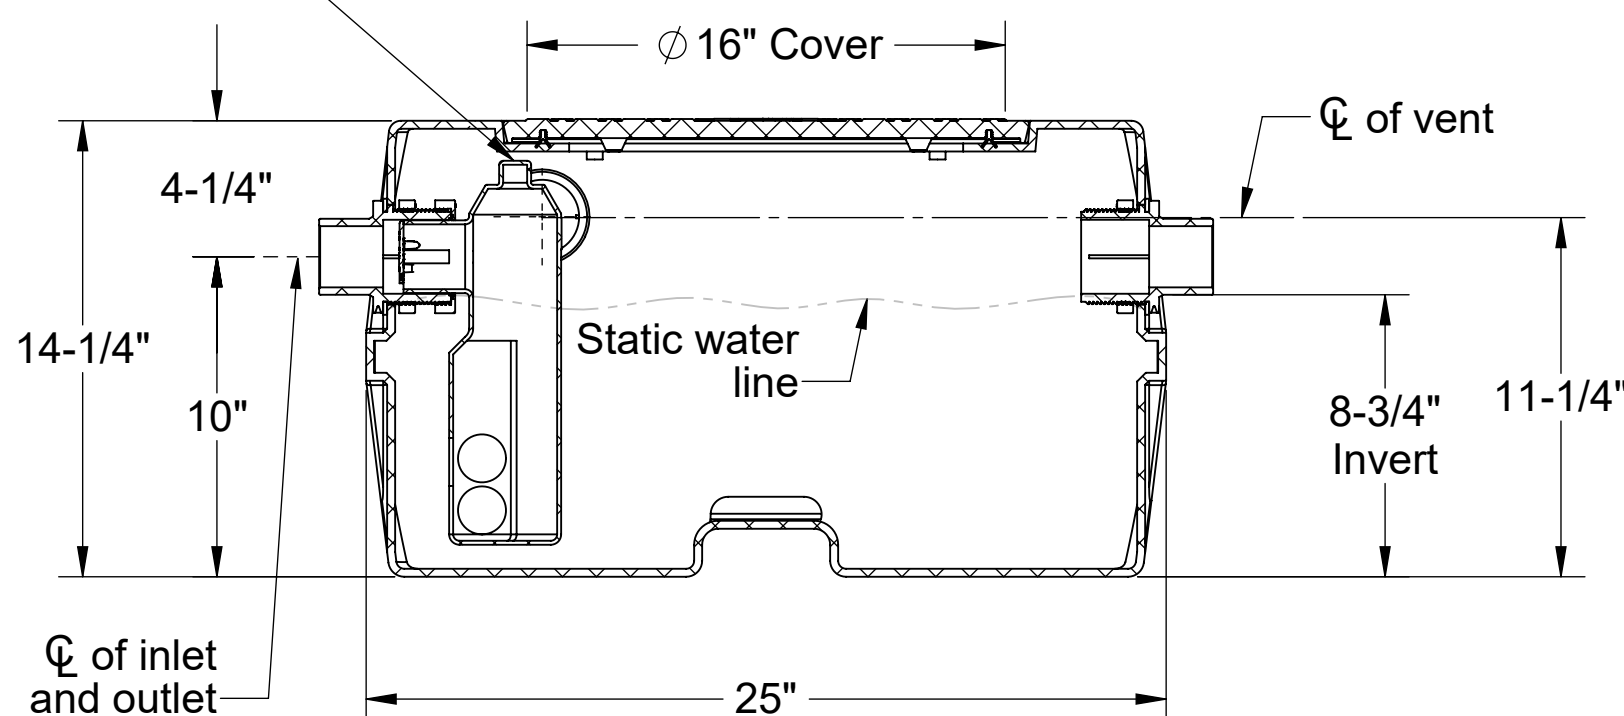

SECTION "A-A"

Signature of Approval: _____
 Company: _____
 Date of Approval: _____
 Specifying Engineer: _____
 Engineering Firm: _____

MODEL NUMBER:	LB-15
DESCRIPTION:	LAB BASIN SERIES POLYETHYLENE CHEMICAL WASTE TANK
DWG BY: MJ	DATE: 10/19/18
REV: 0	ECO:

SPECIFICATION SHEET

Striem
 3100 Brinkerhoff
 Kansas City, KS 66115
 Tel: 913-222-1500
 Fax: 913-291-0457
 www.striemco.com



Made in the U.S.A

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.