

SPECIFICATIONS (SPK-A)


- 1. Liquid holding capacity: 1 Gallon
- 2. Maximum operating temperature 190 °F continuous.

NOTES

- 1. For above grade placement of pH probe for CC-1 or CC-2 pH Command Center monitoring package
- 2. For gravity drainage applications only. Do not use for pressure applications.
- 3. 3/8" thick seamless high density polyethylene walls.
- 4. Unit for above grade installation

OPTIONS:

- Plain end connections available in 1-1/2", 2", 3", 4" and 6" pipe size
- Female pipe thread connections available in 1-1/2", 2", 3" and 4" pipe size.
- Flanged pipe connections available in 1-1/2", 2", 3", 4" and 6" pipe size

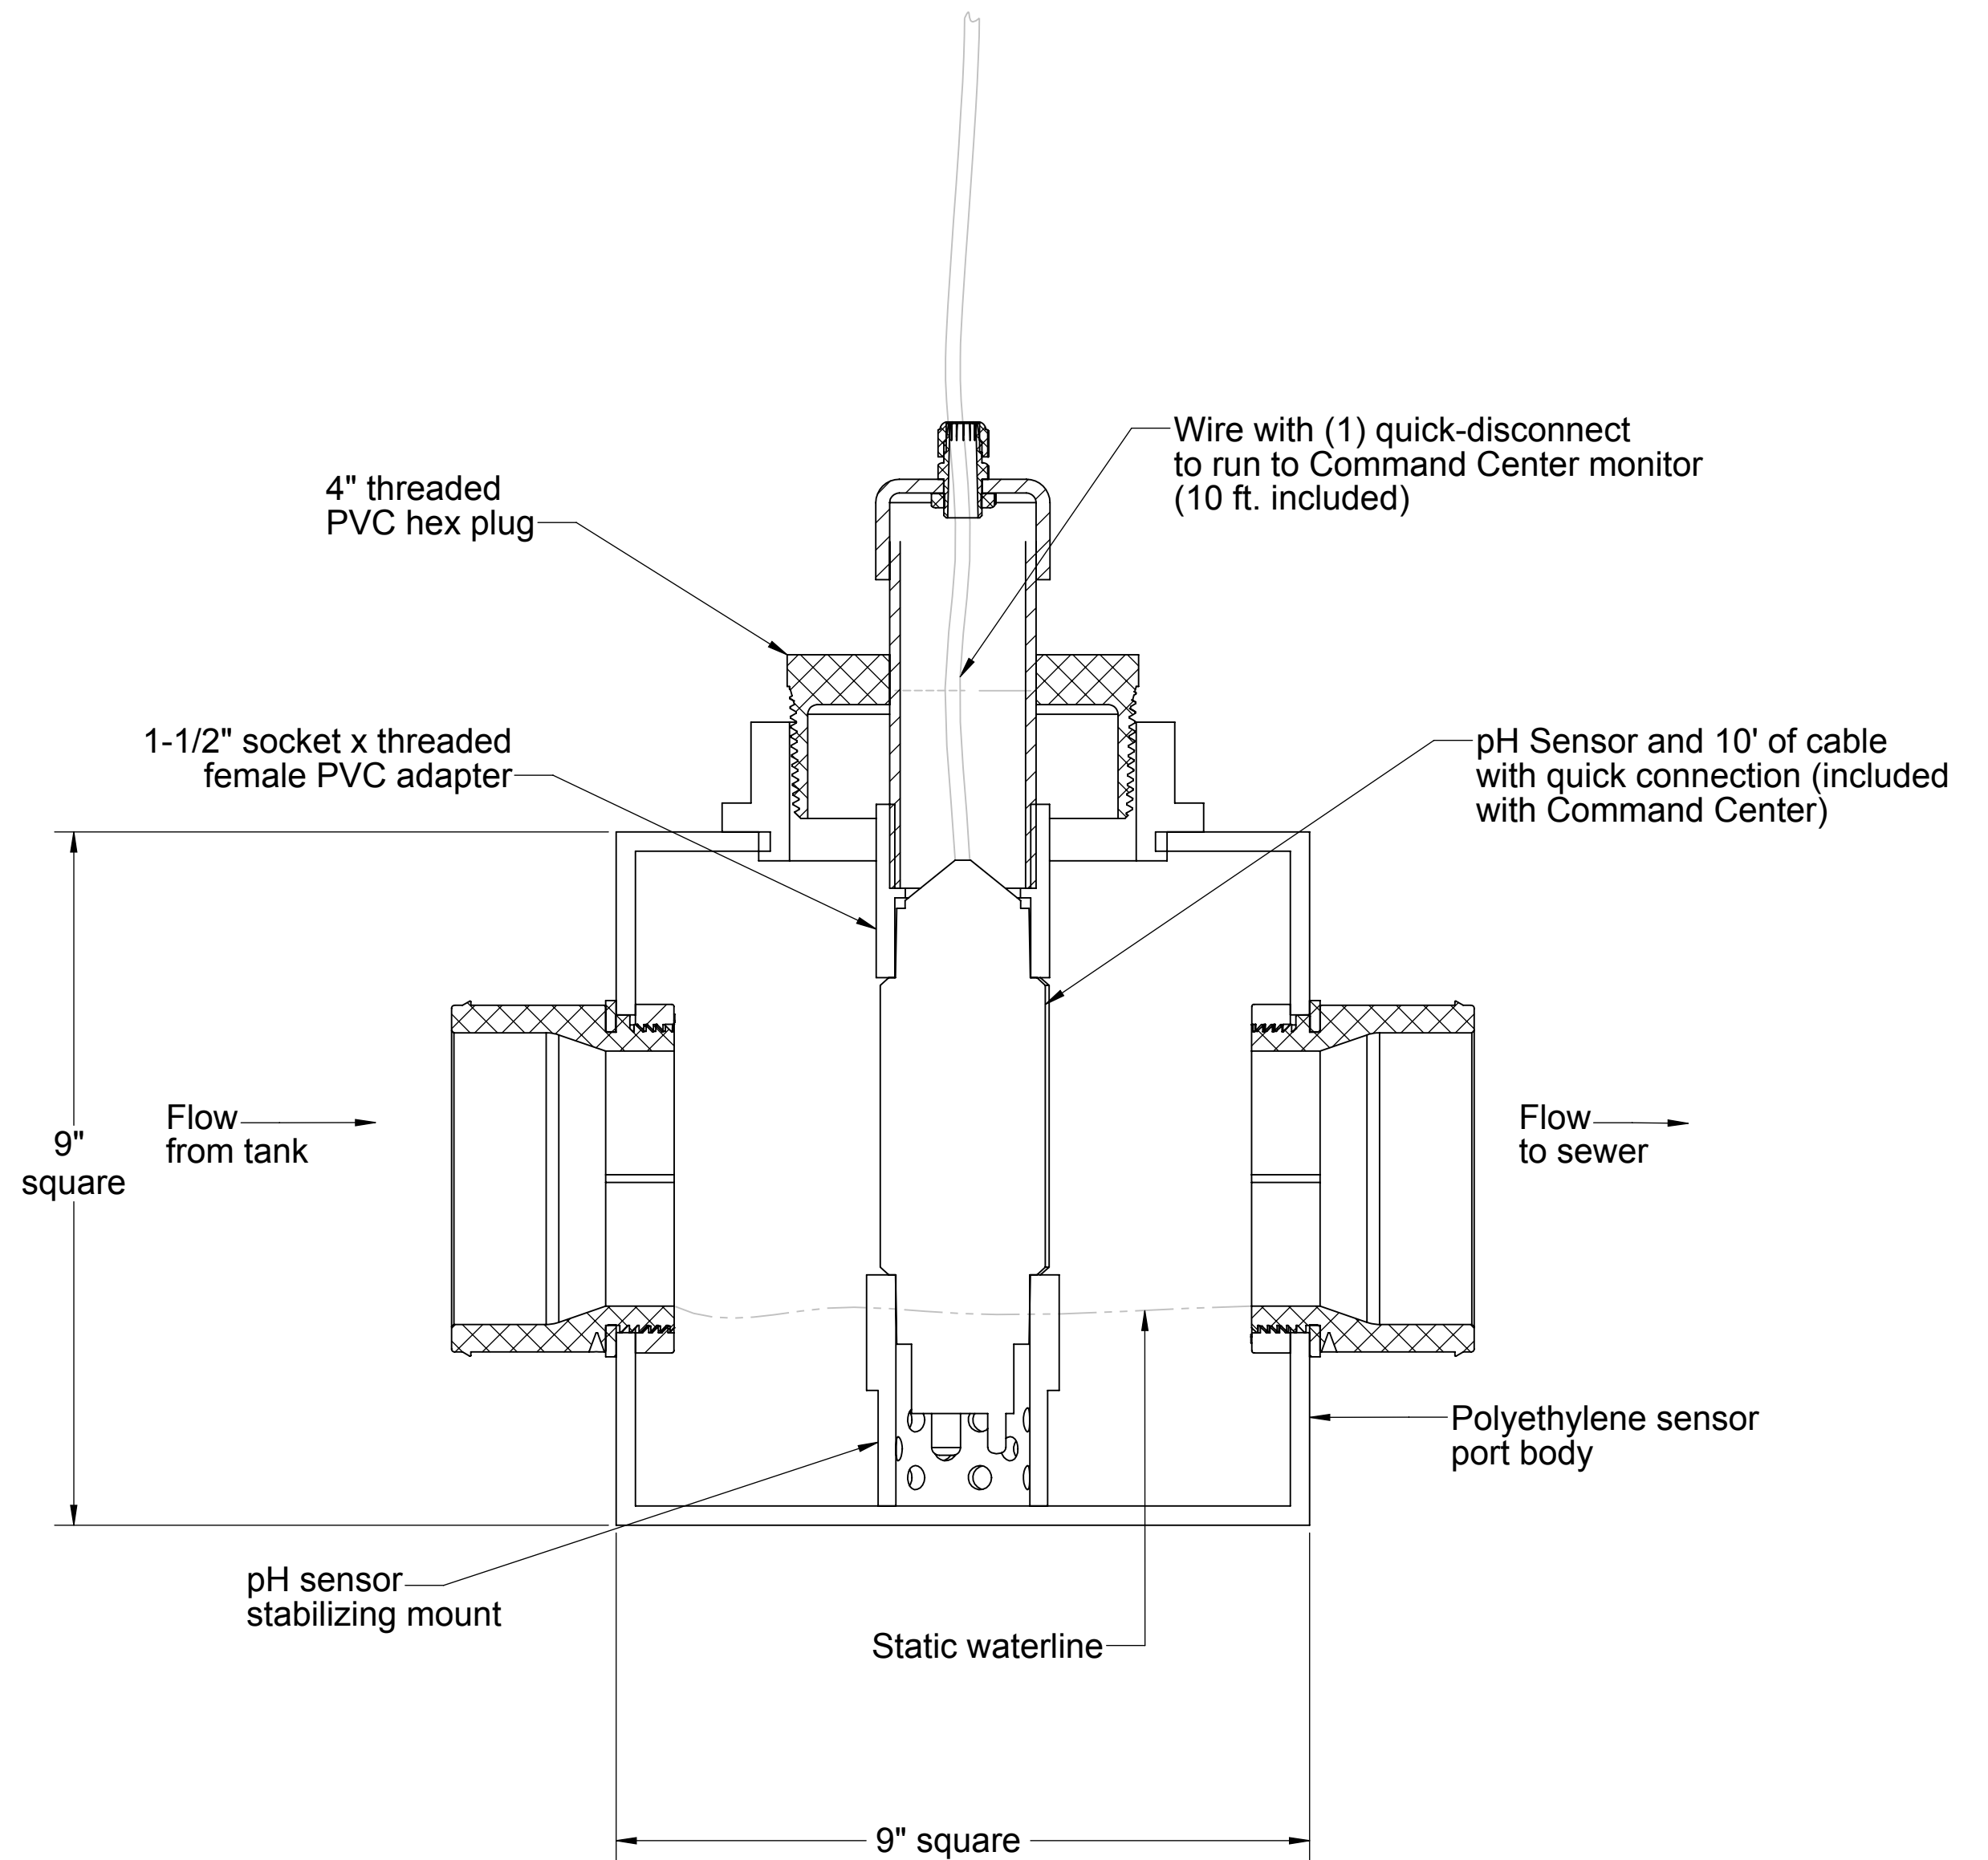

MODEL NUMBER: SPK-A	
DESCRIPTION: ABOVE GRADE pH SENSOR PLACEMENT KIT	
DWG BY: RS	DATE: 3/1/17
REV:	ECO:

Striem
9500 Woodend Road
Edwardsville, KS 66111
Tel: 913-222-1500
Fax: 913-951-3399
www.striemco.com

Made in the U.S.A



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.